828 1073 CLM - GCT

WORKING PRESSURE 10 PSI
TESTING PRESSURE 15 PSI

DO NOT SCALE

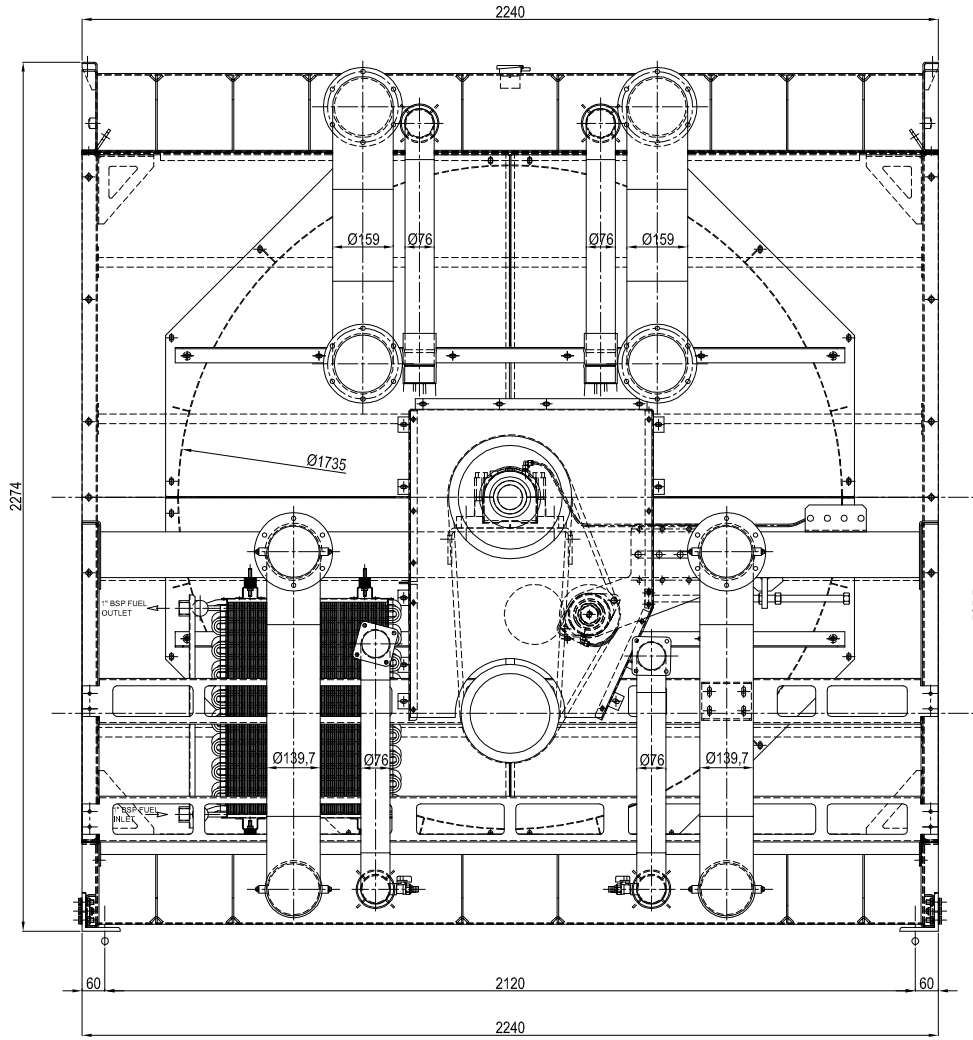

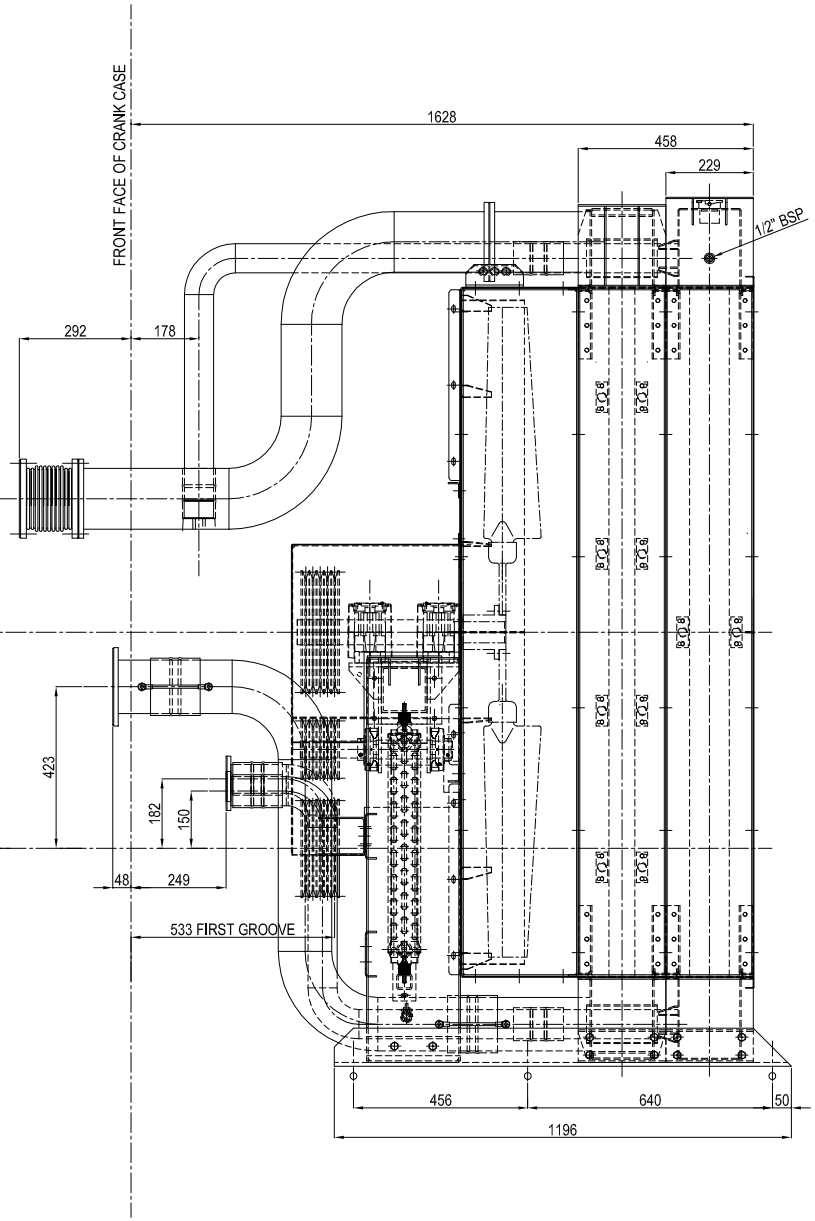

RADIATOR COOLANT CAPACITY	: 213 Lt.
ENGINE BLOCK COOLANT CAPACITY	: 73 Lt.
TOTAL SYSTEM COOLANT CAPACITY	: 286 Lt.

BELT DESCRIPTION	: SPB V BELT
BELT LENGHT	: 2060 mm
CRANK PULLEY DIAMETER	: 250 mm 5 GROOVE
FAN PULLEY DIAMETER	: 315 mm 5 GROOVE

%60 PURE WATER (WITHOUT LIME) AND %40 ANTIFREEZE MUST BE USED IN THE SYSTEM.

© THIS DRAWING IS THE COPYRIGHT OF PANOTO RADIATORS AND MUST NOT BE REPRODUCED OR PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

© BU ÇİZİMİN TÜM TELİF HAKKI PANOTO RADYATÖR'E AİTTİR. YAZILI İZİN OLMAKSIZIN ÇOGALTILAMAZ VE ÜÇÜNCÜ ŞAHISLARA VERİLEMEZ.

NO	PART	QTY	SPEC	DESCRIPTIONS	LETTER	DATE	DESCRIPTION	DRAWN BY	APPROVED BY
1	—	—	—	--	—	—	—	—	—

FABRICATION TOLERANCES		ASSEMBLY TOLERANCES	
1 - 200	±1	UP TO 500	±2
201 - 500	±1.5	501 TO 1000	±3
501 - 1000	±2	1001 TO 2000	±5
1001 - 2000	±3	ABOVE 2000	±8
ABOVE 2000	±3.5	ANGULAR	±2°
ANGULAR	±1°	DIMENSIONS IN MM	

ISSUE	A		
SCALE			
DRAWN BY	HASAN BİLGİN	15.05.2014	
CHECKED BY		15.05.2014	
APPROVED BY	ADNAN ÇOBAN	15.05.2014	

ENGINE MODEL	PERKINS 4012 - 46 TAG 3A 1500RPM PRIME POWER
TITLE	55°C BELT DRIVE RADIATOR
NAME	DATE / SIGNATURE

THIRD ANGLE PROJECTION

PANOTO RADYATÖR MAKİNA ve SAN. TİC. A.Ş.

PART NO: 828 1073 CLM - GCT

DRAWING NO: